



## SPECIFICATIONS

Length Overall (LOA) (feet) .....52'-10"  
 Length Overall (meters) .....16.1  
 Beam Overall (BOA) (feet) .....12'-6"  
 Beam Overall (meters) .....3.8  
 Shallow Water Capable (draft) .....36"  
 Twin Diesel Engine/Water Jet Propulsion:  
 Max HP .....1,700  
 Top Speed (knots) .....40+  
 Max Range (NM) .....250 @ 35 knots

Personnel Capacity .....23+  
 Seated Positions .....18-23  
 Operational Load (lbs) .....49,000  
 Certified Air Transportable via C-17 and C-5  
 Capable of Operating in all Weather Conditions  
 (ambient air temp range) .....0°F to 125°F  
 Water Temp Operating Range .....28°F to 95°F  
 Freshwater Flush System for Engines & Generator

5086 Aluminum Hull with Reinforced Keel  
 and Breaching Plates  
 Wired for ROSAM, Smoke Launchers and  
 GAU17 Machine Guns  
 Foundation for Remote Weapons System & Ring  
 Four Structural Gun Mounts: 2 Midship, 2 Aft  
 Upgraded Muffler System (quieter, less wear  
 & tear from backing down)

\*All specs, features and GAs shown are subject to change

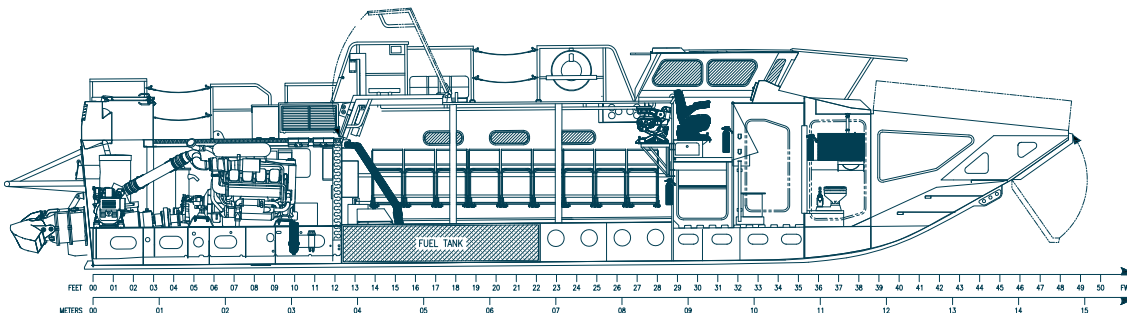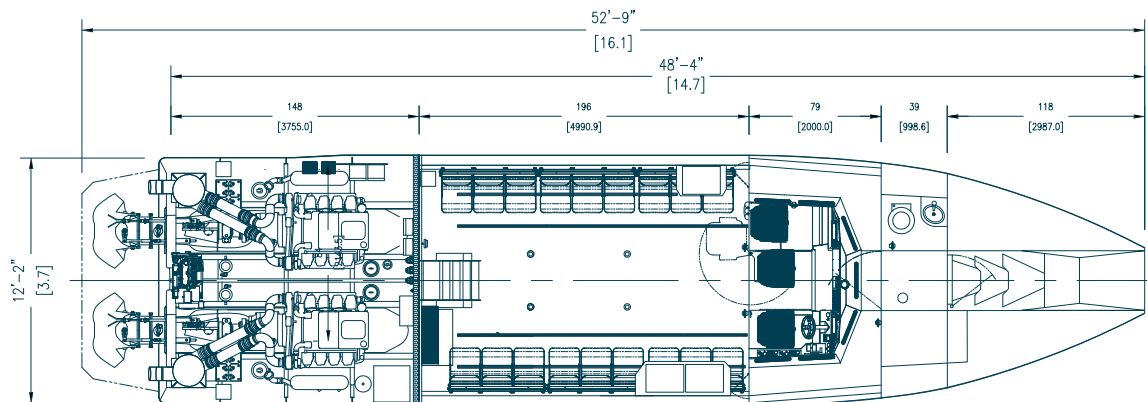



## SAFE RIVERINE COMMAND BOAT



[www.safeboats.com](http://www.safeboats.com)

**SAFE Boats International, LLC** 8800 SW Barney White Rd. | Bremerton, WA 98312 office: 360.674.7161 | fax: 360.674.7149  
Technical data subject to U.S export restrictions under the International Traffic in Arms Regulations (ITAR) or the Export Administration Regulations (EAR).